
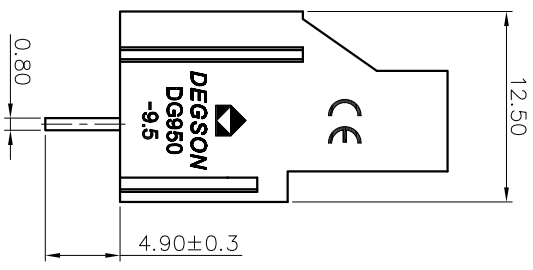
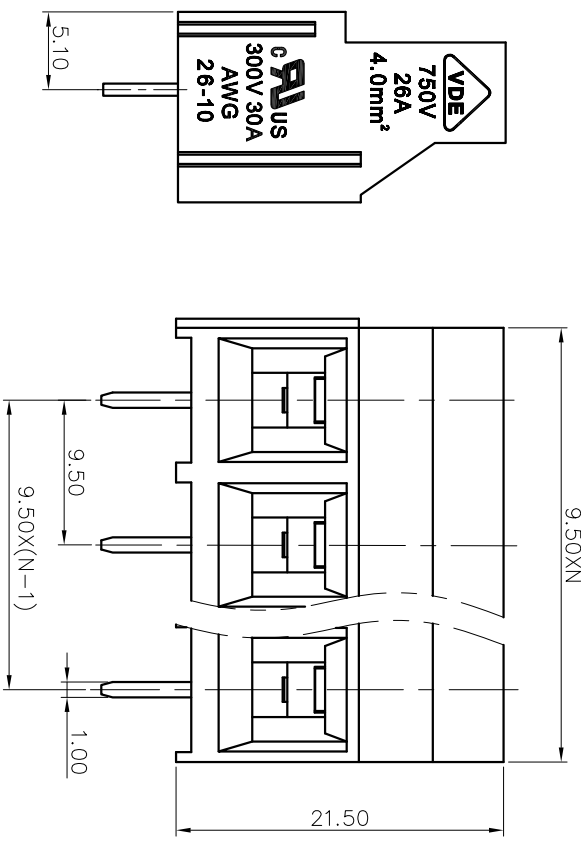


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

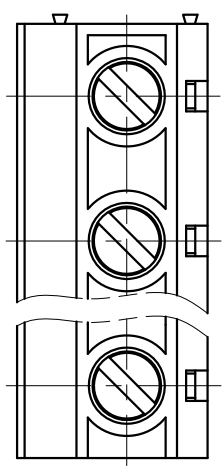


DG950 - 9.5 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 00A-(Standard)
 (RoHS)

Pitch range	in mm		Nominal dimension range		mm	
	Over	TO	Over	Over		
6	10	24	30	60	0.1/10	
10	10	30	60	100	150	
15	±0.20	±0.30	±0.50	±0.70	±1.00	±.30
						±2°

7.RoHS Compliance

- NOTES1:
- UL Standard
 - Rated Voltage/Current : 300V / 30A
 - Torque Value : M3 , 4.43Lb.in
 - Wire Range : 26~10AWG
- IEC Standard
- Rated Voltage/Current : 750V / 26A
 - Torque Value : M3 , 0.5N.m
 - Wire Range : 1.5~4mm²
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 9.5mm, Poles : N=02~24P
 - Stripping length : 8~9mm
 - Withstanding Voltage : AC3000V/1min.
 - Operating temperature : -40°C~+105°C
 - Undimensioned Tolerances:

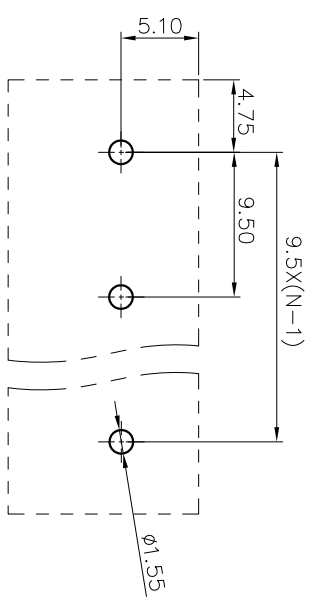

A 8 7 6 5 4 3 2 1

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO.,LTD
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1